



Product Catalog

**on mounting systems
for PV farms**

Content

About the company	3
On-roof mounting systems	
Mounting system for pitched roofs SRS-S	5
Mounting system for flat roofs SRS-F	6
Mounting system for flat roofs SRS-B (under the ballast)	7
Mounting system for flat roofs SRS-EW-B (East-West)	8
Mounting system for flat roofs SRS-102 EW (East-West)	9
Mounting system for flat roofs SRS-102 (under the ballast)	10
On-ground mounting systems	
On-ground mounting system SMS-212	11
On-ground mounting system SMS-212 SMART	12
On-ground mounting system for bifacial PV modules SMS-212L	13
On-ground mounting system SMS-212 EW (East-West)	14
On-ground mounting system SMS-211	15
On-ground mounting system with changeable tilt angle SMS-211C	16
On-ground mounting system SMS-312	17
On-ground mounting system SMS-402	18
Contacts	19



About the company

Solar Steelconstruction – is:

3 500+ More than 3 500 MW of installed SPP

1 000+ Own integrated manufacturing process with capacity of 1 GW a year


300+ MWp installation as EPC

We export to more than 30 countries of the world:

Solar Steelconstruction LCC

was founded in 2012 and based in Ukraine. Today we are the largest manufacturer of the mounting systems for PV sector in Ukraine and Eastern Europe.

ISO 9001
ISO 14001
ISO 45001
EN 1090-1,4 FPC certified
All steel structures are CE-marked

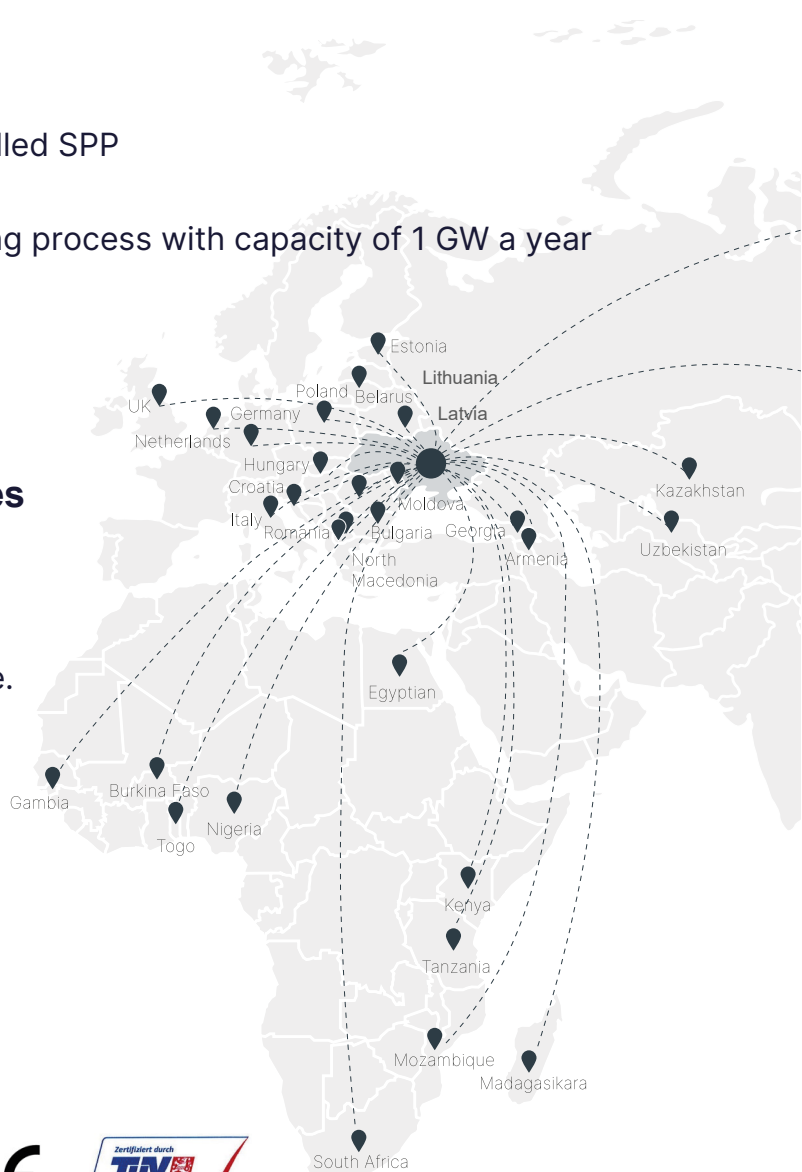



Mounting systems for PV farms

On-roof mounting
systems for PV farms



On-ground mounting
systems for PV farms



The equipment includes more than 400 profile sizes:



4 lines to cut the rolled steel
with width 0,3-2 mm and 2-6 mm



Warehouses in different regions
of Ukraine and Europe



Over 160 units of equipment
to process metal, including
stamping, cutting, welding



9 profile rolling lines to manufacture
over 400 standard sizes of the most
common types of profiles



Hot dip galvanizing bath



Plasma & Laser cutting centers;
CNC Drilling & Grinding centers



All premises are equipped with
overhead cranes and crane beams
with a load capacity 5-20 tons


On-roof mounting system for the pitched roofs SRS-S




The mounting system is designed for installing solar PV modules on a pitched roof.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.



Zinc coating is the key to the durability of the PV farm.

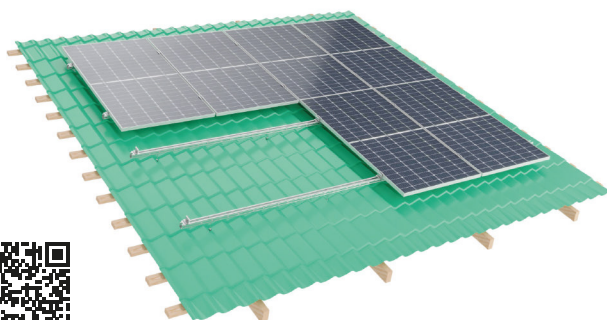


Characteristics:

Angle of inclination of the PVM	15° – 60°
Angle of inclination of the roof	up to 60°
Type of attachment to the roof	Anchored

Possible PV modules orientation:



Landscape



Portrait

Fasteners of the PVM that depend on the roof covering:



Trapezoidal sheeting



Standing seam tile



Trapezoidal sheeting



Metal tile



Bituminous tile



Ceramic tile

The main connection nodes:



The main node



Screw



End fastening




Mid fastening



Rail with connection element

Constituent elements:






This on-roof mounting system is designed for the installation of PV modules on the flat roofs with the punch holes and damage the roof covering.




Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.



Zinc coating is the key to the durability of the PV farm.

On-roof mounting system for the flat roof SRS-F

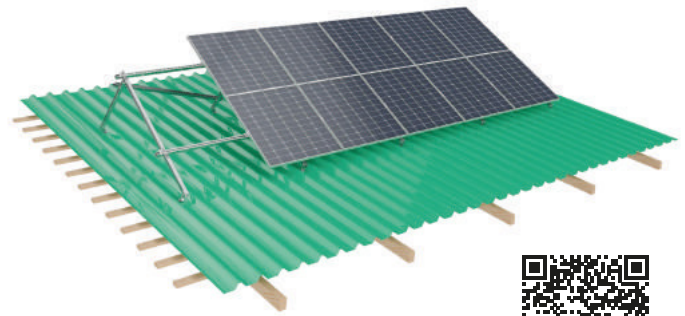


Characteristics:

Angle of inclination of the PVM	up to 45°
Angle of inclination of the roof	up to 10°
Type of attachment to the roof	Anchored

Possible PV modules orientation:




Landscape



Portrait

The constituent elements from the angle of inclination required for generation:

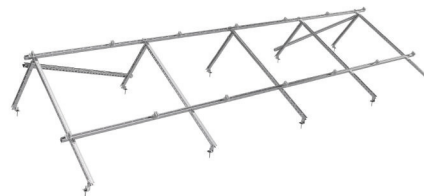

The main connection nodes:



The main node



Screw



End fastening



Mid fastening




Rail with connection element

Constituent elements:



On-roof mounting system for the flat roof SRS-B


under ballast



Ballast on-roof mounting system is a solution for roofs in which it is undesirable or impossible to punch holes or damage the coating. Frames with ballasts are a feature of the configuration.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.



Zinc coating is the key to the durability of the PV farm.


Characteristics:

Angle of inclination of the PVM	up to 45°
Angle of inclination of the roof	up to 10°
Type of attachment to the roof	Under ballast

Possible PV modules orientation:



Landscape



Portrait

The constituent elements from the angle of inclination required for generation:



The main connection nodes:



End fastening



Mid fastening



Rail with connection element



Ballast nodes

Constituent elements:






PV modules installation on the flat roof with East-West orientation allows to use the area most effectively as well as to distribute the electrical loads during the day.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.



Zinc coating is the key to the durability of the PV farm.

On-roof mounting system for the flat roof SRS-EW-B

East-West




Characteristics:

Angle of inclination of the PVM	up to 15°
Angle of inclination of the roof	up to 10°
Type of attachment to the roof	Anchored / Under ballast

Possible PV modules orientation:



Landscape



Portrait

The constituent elements from the angle of inclination required for generation:



The main connection nodes:



End fastening



Mid fastening



Rail with connection element




Ballast nodes

Constituent elements:



On-roof mounting system for the flat roof SRS-102 EW


East-West



PV modules installation on the flat roof with East-West orientation allows to use the area most effectively as well as to distribute the electrical loads during the day.



Less metal consumption and simpler logistics. No need for additional components. A successful system with direct access to load.




Zinc coating is the key to the durability of the PV farm.



Characteristics:

Angle of inclination of the PVM	up to 20°
Angle of inclination of the roof	up to 10°
Type of attachment to the roof	Anchored / Under ballast

Fixation options:




On the short side



On the long side

Brackets:



Constituent elements:






The on-roof mounting systems is designed for the installation PV modules on the flat roof.




Less metal consumption and simpler logistics. No need for additional components. A successful system with direct access to load.



Zinc coating is the key to the durability of the PV farm.

On-roof mounting system for the flat roof SRS-102


under ballast

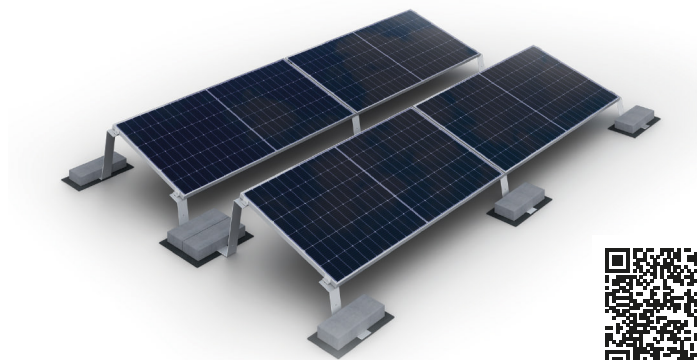


Characteristics:

Angle of inclination of the PVM	up to 20°
Angle of inclination of the roof	up to 10°
Type of attachment to the roof	Anchored / Under ballast

Fixation options:




On the short side



On the long side


Brackets:

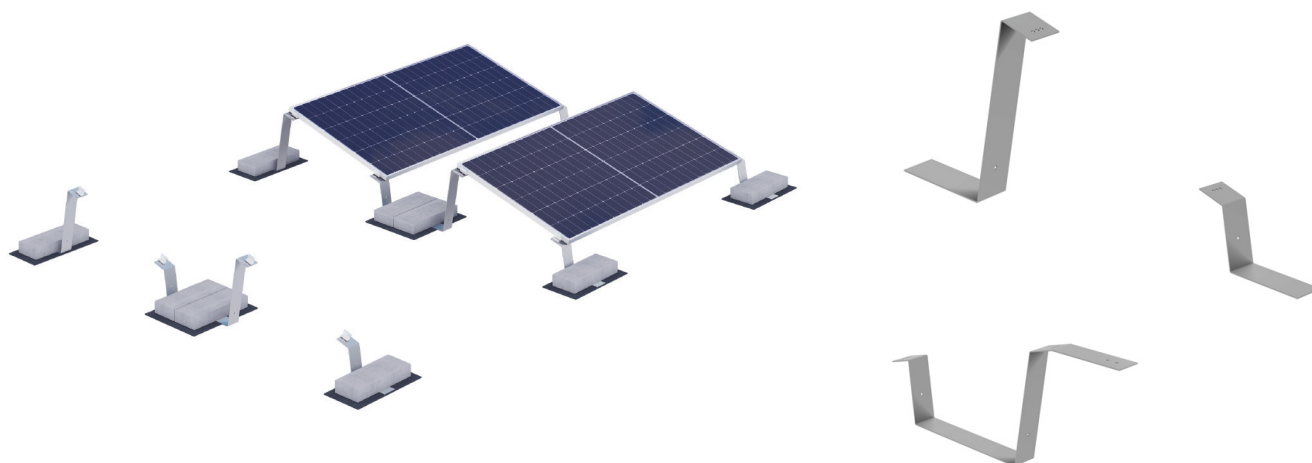

Constituent elements:




On-ground mounting system SMS-212



Two-way ground train design for storage PV modules in two rows.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.




Zinc coating is the key to the durability of the PV farm.

Characteristics:

Angle of inclination of the PVM	15°-45°
The number of piles rows	2
The number of PVM rows	2

Possible PV modules orientation:



Portrait

Foundation options:



Ramming




Ramming with concreting



Concreting



Installation on concrete blocks



Anchoring piles

Application features of profiles with different sections:

C
Steel C-profile



Z
Steel Z-profile




L
Steel special profile



R
Steel perforated rail-profile






The main feature of SMS-212 SMART is using of rails made of perforated profile 41x41. Lightweight and reliability are combined in a new mounting system.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.



Zinc coating is the key to the durability of the PV farm.


On-ground mounting system SMS-212 SMART



Characteristics:

Angle of inclination of the PVM	15°-45°
The number of piles rows	2
The number of PVM rows	2

Possible PV modules orientation:



Portrait

Foundation options:



Ramming



Ramming with concreting



Concreting



Installation on concrete blocks



Anchoring piles

The main connection nodes:



Fastening of main beams to piles



End fastening



Mid fastening



Rail with connection element

Options of cross-section of the perforated profile of guide beams:




41x41




41x72


On-ground mounting system for bifacial PV modules SMS-212L



The main feature of the structure is absence of shading on the PV module back side. The height from the edge of PV module to the ground is 1.0-1.2 m, that is higher than for usual mounting systems.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.




Zinc coating is the key to the durability of the PV farm.



Characteristics:

Angle of inclination of the PVM	15°-45°
The number of piles rows	2
The number of PVM rows	2

Possible PV modules orientation:



Portrait

Foundation options:



Ramming




Ramming with
concreting



Concreting



Installation on
concrete blocks




Anchoring piles

Application features of profiles with different sections:

L
Steel
Special
Profile






Two-row on-ground mounting system for the PV modules installation in two rows on East and West.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.



Zinc coating is the key to the durability of the PV farm.

On-ground mounting system SMS-212 EW


East-West



Characteristics:

Angle of inclination of the PVM	-
The number of piles rows	2/2
The number of PVM rows	2/2

Possible PV modules orientation:



Portrait

Foundation options:



Ramming




Ramming with concreting



Concreting



Installation on concrete blocks



Anchoring piles

Application features of profiles with different sections:

C

Steel C-profile



Z

Steel Z-profile



L

Steel special profile




R

Steel perforated rail-profile




On-ground mounting system SMS-211



Single-row on-ground mounting system for the PV modules installation.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.




Zinc coating is the key to the durability of the PV farm.



Characteristics:

Angle of inclination of the PVM	15°-45°
The number of piles rows	1
The number of PVM rows	2

Possible PV modules orientation:



Portrait

Foundation options:



Ramming



Ramming with
concreting



Concreting

Application features of profiles with different sections:

C
Steel C-profile




Z
Steel Z-profile



R
Steel perforated rail-profile




On-ground mounting system with changeable tilt angle SMS-211C



On-ground mounting system for the PV modules installation with changeable tilt angle (mechanical trackers) towards the horizon depending on the time of year.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.




Zinc coating is the key to the durability of the PV farm.



Characteristics:

Angle of inclination of the PVM	50°, 42°, 34°, 26°
The number of piles rows	1
The number of PVM rows	2

Possible PV modules orientation:



Portrait

Foundation options:



Ramming



Ramming with concreting



Concreting

Application features of profiles with different sections:

C

Steel C-profile



Z

Steel Z-profile



L

Steel special profile





R

Steel perforated rail-profile




On-ground mounting system SMS-312

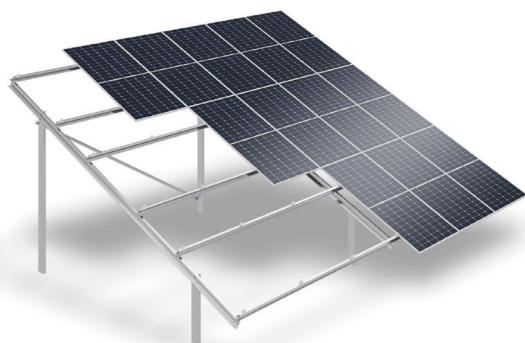

Three-row on-ground mounting system for the PV modules installation in three rows.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.




Zinc coating is the key to the durability of the PV farm.

Characteristics:

Angle of inclination of the PVM	15°-30°
The number of piles rows	2
The number of PVM rows	3

Possible PV modules orientation:



Portrait

Foundation options:



Ramming




Ramming with
concreting



Concreting



Installation on
concrete blocks



Anchoring piles

Application features of profiles with different sections:


C
Steel
C-Profile



R
Steel
R- Profile




On-ground mounting system SMS-402



Four-row on-ground mounting system for the PV modules installation in three four rows.



Fast installation at an optimal price thanks to simple connection without the need for additional components. A reliable system with resistance to loads.



Zinc coating is the key to the durability of the PV farm.



Characteristics:

Angle of inclination of the PVM	15°-30°
The number of piles rows	2
The number of PVM rows	4

Possible PV modules orientation:



Landscape

Foundation options:



Ramming



Ramming with concreting



Concreting



Installation on concrete blocks



Anchoring piles

Application features of profiles with different sections:

C
Steel C-profile



Z
Steel Z-profile



R
Steel perforated rail-profile



Contacts:

Iryna Dotsenko

Commercial Director

☎ +38 067 736 74 27

✉ i.dotsenko@solarsk.com.ua



Balkans:

Hristijan Mircheski

Regional Manager

☎ +38 971 289 619

✉ h.mirceski@solarsk.com.ua



Serbia:

Dejan Rajic

Country Manager

☎ +38 160 442 1639

✉ d.rajic@solarsk.com.ua



Poland:

Stanislaw Dziubacki


Country Manager

☎ +48 578 702 510

✉ s.dziubacki@solarsk.com.ua



solarssk.com



solarsk



solarsk

